

MAGNETIC MEASUREMENTS OF THE PROTOTYPE DIPOLE FOR THE IR-FEL AT THE THOMAS JEFFERSON NATIONAL ACCELERATOR FACILITY

J. Karn, G. Biallas, A. Guerra, and L. Harwood

Thomas Jefferson National Accelerator Facility

12000 Jefferson Avenue, Newport News, VA 23606 USA

Abstract

Magnetic measurements have been performed on the prototype dipole for the high power IR-FEL presently under construction at the Thomas Jefferson National Accelerator Facility. The optics-driven requirements for these magnets include low fields, large horizontal apertures, tight field homogeneity, absolute setability of core field & integrated field, and control of the horizontal & vertical focusing terms designed into the magnets. A prototype dipole was fabricated and underwent several iterations of mechanical adjustment and magnetic measurement. Measurements were made to quantify the effects of field clamps on vertical focusing terms and effective length. Additional tests were made using various applications of Purcell gaps and high permeability materials in order to achieve the required homogeneity. Results from the prototype have been integrated into the design of the seven families of dipoles needed for the FEL.

1 INTRODUCTION

A 1 kW infrared free-electron laser is under construction at the Thomas Jefferson National Accelerator Facility. The injector for the accelerator produces a 10 MeV, 5 mA CW electron beam. The injected beam is accelerated to 42 MeV using a single CEBAF-style SRF cryomodule. A wiggler and optical cavity produce light in the 3 to 6.6 micron range. A transport arc recirculates the beam exiting the wiggler back through the cryomodule for energy recovery. A potential upgrade to a beam energy of 75 MeV would produce light in the 1 micron range.

2 DIPOLE DESIGN REQUIREMENTS

The lattice design of the IR-FEL was tightly constrained due to the low energy, high current, and the 5% relative momentum spread of the recirculated beam [1]. The accelerator requires a total of 29 bending dipoles consisting of 7 different families. The recirculation dipoles will be engineered for beam energies from 33 to 75 MeV. Injector dipoles will cover injection beam energies from 8 to 12 MeV. Table 1 summarizes the 7 families and their field strength requirements.

Dipole Family	Quantity	Core Field Range (kG)	Effective Length (m.)
DU	7	0.45 - 0.67	0.21
DV	2	0.45 - 0.67	0.43
DX	4	1.10 - 2.64	0.51
DQ	4	1.10 - 2.64	0.51
DW	8	1.04 - 2.48	0.41
DY	2	1.10 - 2.64	3.14
DZ	2	0.92 - 2.20	0.21

Table 1: Dipole strength specifications

In the designed lattice, the dipoles are also used to manage dispersion and the beam envelope in the recirculation arc. To provide horizontal focusing four of the dipole families have wedge shaped cores with included angles ranging from 7.7° to 20.0°. Important to vertical focusing is the end-field roll-off integral defined as:

$$K_1 = \int_{-\infty}^{\infty} \frac{B_y(z)[B_0 - B_y(z)]}{gB_0^2} dz$$

where g is the height of the gap and B_0 the field strength in the center of the magnet.

The specifications for the horizontal and focusing terms are listed in Table 2 [2].

Constraint	Tolerance
End-field roll-off integral (K_1)	0.27 ± 0.05
Field integral slope tolerance	$6.25 \times 10^{-4} / \text{m} \times B_p$
Relative field integral flatness	1×10^{-4}

Table 2: Dipole focusing specifications (rms)

Excitation errors in the dipoles could lead to undesirable steering and focusing effects. This puts constraints on the reproducibility of the magnets and the knowledge of the absolute core field and integrated field. Since several of the dipole families are powered in series by a common power supply, the variance of magnets within a family is important. Excitation tolerances are listed in Table 3 [2].

Constraint	Tolerance
Reproducibility of integrated field	1×10^{-4}
Accuracy of core field	1×10^{-3}
Accuracy of integrated field	1×10^{-3}
Tracking within dipole family	1×10^{-3}

Table 3: Dipole excitation error tolerances (rms)

3 CONSTRUCTION OF PROTOTYPE DIPOLE

A single prototype dipole (Figure 1) was fabricated to help quantify the above mentioned tolerances for all seven dipole families. The magnet was a window frame design with a AISI 1006 low-carbon steel core and two saddle-style coils. The coils were 27 turns each, wound from 0.25 inch hollow-core copper conductor, and encased in glass epoxy.

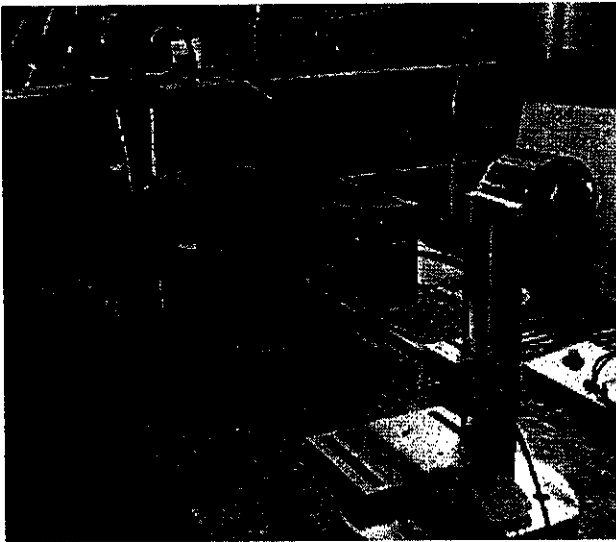


Figure 1: Prototype Dipole

4 MAGNETIC MEASUREMENTS

4.1 Measurement Setup

The measurements described below were performed using a Group 3 Hall Effect Probe and a Metrolab NMR Teslameter. The probes were attached to a cart that provided transverse and longitudinal motion. The cart referenced off a granite surface plate to maintain a constant probe orientation with the magnet. A PC-based data acquisition system recorded the probe values at the selected position steps.

4.2 Longitudinal Measurements

There were three areas of interest to study from longitudinal profile measurements: fringe fields, effective length, and the field roll-off integral. The extent of the fringe field was important due to the compact design of

the lattice and the close proximity of the dipoles to other beamline elements. Determining the effective length to an accuracy better than 1×10^{-3} was needed to meet the core field and field integral tolerances for all dipole families. Determination of the field roll-off integral was required to finalize the lattice design. (The lattice designer graciously left this value flexible to accommodate magnet design.)

Once fringe fields could be brought to an acceptable level, measurements could be made to quantify the effective length and the field roll-off integral. The first measurements revealed the field dropped off to 0.1% at a distance of 37.0 cm from the end of the iron core. To minimize the extent of fringe fields, various designs of field clamps were tested. The final design was a clamp of 0.5 inch thick steel surrounding the coil and connected to the iron core. This setup resulted in the field dropping to 0.1% at a distance of 15.0 cm from the iron core. Figure 2 shows the change in field fall-off with the addition of the field clamp.

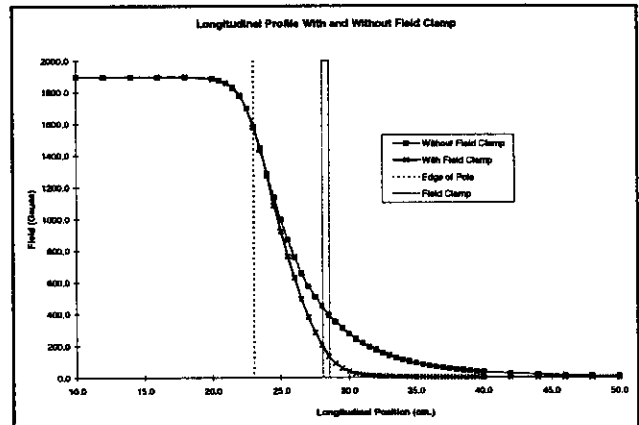


Figure 2: Longitudinal field fall-off with added field clamp.

With the design of the field clamp finalized, measurements were taken to determine the effective length and the field roll-off integral. Longitudinal profiles were made over the operating ranges needed for the 7 families of dipoles. The effective length was calculated to be 25.396 ± 0.004 cm. (1.6×10^{-4} relative) over the operating range. The field roll-off integral was calculated to be 0.31 ± 0.01 over the operating range. Both values were within the tolerances defined in Section 2.

4.3 Transverse Measurements

Measurements were made to study the transverse field homogeneity inside the core. These measurements would be the first step in achieving the 1×10^{-4} integrated field flatness defined in Section 2. The first measurements revealed a relative deviation from flatness of $\pm 1 \times 10^{-3}$, an order of magnitude larger than the requirements. The